



3 WAY STAINLESS STEEL BALL VALVE

SCREWED END

Model: KVS - 368

SPECIFICATION

- Pressure Rating: 1000 WOG
- Working Medium: Water, Oil, Steam, Chemical, Air
- Working Temperature: -20°C ~ 200°C
- Blow-out proof stem
- Optional: Pneumatic or Electric actuated
- ISO 5211 direct Mounting pad
- T port or L port available
- Thread connection: BS21 (ISO 7) / BS EN10226-2
ASME B1.20.1 (NPT)





MATERIALS

Description	Material
Body	Stainless Steel CF8M
Ball	Stainless Steel CF8M
Stem	Stainless Steel CF8M
Gland Nut	AISI 304
Seat	PTFE
Handle	PVC

DIMENSIONS (mm)

DN		L	L1	H	H1	H2
inches	mm					
1/2"	15	76	153	67	58	37
3/4"	20	76	153	67	58	37
1"	25	76	153	67	58	37
1 1/2"	40	86	153	77	72	44
2"	50	99	183	83	81	49
2 1/2"	65	117	183	88	94	57
3"	80	124	246	116	104	61
4"	100	148	246	124	125	74

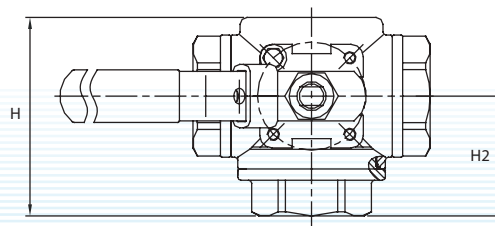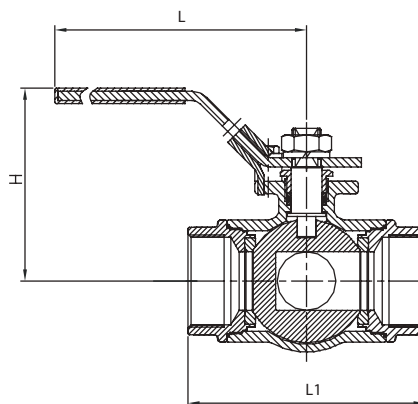

* All dimensions are nominal, actual dimensions may vary